



ROOFING SHINGLES

PRODUCTION CATALOGUE

MIDA roofing shingles

Quality management system certified according to ISO 9001:2015

PREMIUM collection EN 544

The PREMIUM range of shingles is designed to meet the needs of most demanding customers who prioritize highest quality and confidence in their roofing materials. This product line features excellent physical and mechanical properties, ensuring increased durability even in cold climate zones. The presence of a self-adhesive layer not only facilitates seamless installation, but also provides maximum protection against strong gusts of wind.

30
YEARS

MANUFACTURER'S
WARRANTY*



NOTE: Actual product colors may vary slightly from the colors shown in the catalogue.
If color hue is critical for you, please request full-size samples before making your final choice.

* For more information about warranty visit www.mida.lt.

RESIDENTIAL collection ETA 12/0234

The RESIDENTIAL grade series of bitumen shingles with its advanced modified bitumen formula is ideal for residential buildings. Thanks to their increased flexibility, these shingles can be easily installed on complex roof structures even at low temperatures. Furthermore, the performance of this series guarantees exceptional durability of the roofing material.

20
YEARS

MANUFACTURER'S
WARRANTY*



STANDARD collection ETA 12/0234

The STANDARD grade series of bituminous shingles is an ideal choice for non-residential structures such as garden houses, sheds, and garages.

10
YEARS

MANUFACTURER'S
WARRANTY*



* For more information about warranty visit www.mida.lt.



MIDA roofing shingles



MIDA hip & ridge shingles



Valley roll material
MIDA FLEKS EKM



Underlayment
membranes



MIDA SELF PRO



Ridge ventilation



Roofing nails




Classic system

The system is designed for the creation of a cold attic on pitched roofs of any complexity and configuration. MIDA roofing shingles are used as a roof covering.

SYSTEM COMPONENTS:

1. Rafter
2. Counter battens
3. Wood decking (OSB-3, plywood, wooden boards)
4. Underlay bitumen membrane
5. Adhesive for roofing shingles
6. MIDA roofing shingles

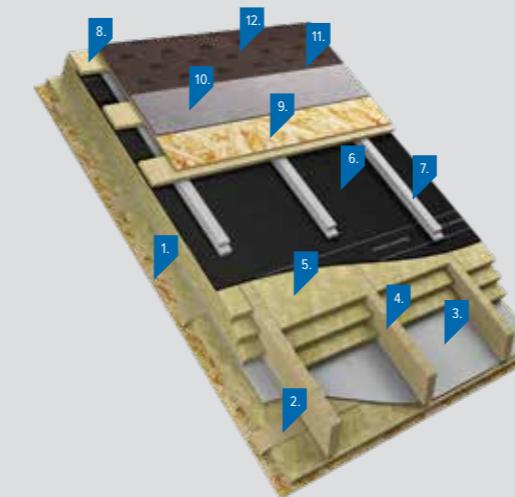

Attic system

The system is used for the creation of an attic floor in low-rise buildings and cottages. MIDA roofing shingles are used as a roof covering.

SYSTEM COMPONENTS:

1. Attic interior finish
2. Counter battens
3. Vapor barrier membrane
4. Rafter
5. Stone wool
6. Superdiffusion membrane
7. Ventilation space battens
8. Counter battens
9. Wood decking (OSB-3, plywood, wooden boards)
10. Underlay bitumen membrane
11. Adhesive for roofing shingles
12. MIDA roofing shingles



MIDA SELF KSK EN 13707

Self-adhesive bitumen membrane for pitched roofs

Easiest roof covering ever! MIDA SELF KSK bitumen membrane is self-adhesive elastomeric bitumen membrane, covering the entire surface. Installation of the membrane is quick, simple and safe way to cover various roofs of simple buildings, for instance, garden homes, storage sheds, car ports, pavilions, etc. All you have to do is to unroll, attach with nails, remove protective film and press!



Red



Green



Brown



Grey



Black



1370-CPR-0041

Accessories

MIDA hip & ridge shingles	
	Hip & ridge shingles produced with SBS modified bitumen are extremely flexible; they are used for quick and easy installation of a initial row along eaves. These pre-cut shingles can be separated into three smaller pieces for further application on hips and ridges to add the perfect aesthetic finish to your roof. Maximum protection against wind, snow and rain is provided. Available in a wide range of colors to match any chosen roofing color solution. Dimensions: 1 m x 0,25 m Coverage per a bundle: 12 lin. m (hips & ridge). Color: ■ ■ ■ ■ ■
Hip & ridge shingles	
Hip & ridge shingles produced with SBS modified bitumen are extremely flexible; they are used for quick and easy installation of a initial row along eaves. These pre-cut shingles can be separated into three smaller pieces for further application on hips and ridges to add the perfect aesthetic finish to your roof. Maximum protection against wind, snow and rain is provided. Available in a wide range of colors to match any chosen roofing color solution. Dimensions: 1 m x 0,25 m Coverage per a bundle: 12 lin. m (hips & ridge). Color: ■ ■ ■ ■ ■	
Color: ■ ■ ■ ■ ■	

Roofing nails	
	Anticorrosive roofing nails with circular cross-section for fastening of bituminous shingles to a wooden deck. Also used for mechanical fastening of roof accessories. Head diameter ≥ 9 mm, nail diameter ≥ 3.5 mm, shank length – 30 mm.
Roofing nails	
Anticorrosive roofing nails with circular cross-section for fastening of bituminous shingles to a wooden deck. Also used for mechanical fastening of roof accessories. Head diameter ≥ 9 mm, nail diameter ≥ 3.5 mm, shank length – 30 mm.	

Adhesive for roofing shingles	
	Provide extra adhesion of roofing shingles and other bitumen-based materials to such surfaces as brick, concrete, metal, wood, ceramic etc.
Adhesive for roofing shingles	

MIDA ROOFING SHINGLES			PREMIUM	RESIDENTIAL	STANDARD
UNDERLAY		MIDA SELF PRO	●	●	●
		MIDA ROOF FIX EMM SBS	●	●	●
		MIDA LIGHT S Euro	●	●	●
		MIDA LIGHT G Euro	●	●	●
ALSAN MASTIC 2200		Adhesive for roofing shingles	●	●	●
NAILS		30 mm	●	●	●



Why is it comfortable with MIDA roofing shingles all year round?



PERFECT FOR COMPLEX ROOFING DESIGN

Roofing shingles are a construction material for residential roofing applications that is used on roof slopes of 12° or greater. It is the smartest solution for a complex or intricate roof design.



NOISE INSULATION

Multilayer coating and its specific components make extremely quiet roofing. The noise of rain, wind or hail hitting the roof will not torture you. Enjoy peace and quiet in your house!



ALL-WEATHER

Our roofing shingles efficiently protect you from merciless heat as well as from freezing winds, and thus help to maintain comfort temperature inside all the year round! They are suitable for any climate with temperatures ranging from -70°C to +80°C.



BASALT GRANULES SURFACE

The coating made of natural basalt retains color, does not fade in the sun and does not change its color during the whole service life.



SNOW SLIDE PREVENTION

The rough structure of basalt pellets' surface prevents the snow from falling down from the roof and facilitates its gradual melting.



LEAK RESISTANCE

After installation, shingles are caked together into monolithic roofing, ensuring absence of slits and complete leak tightness.

PACKING LIST SHINGLES

Main characteristics	Quantity in the package, units / m ²	Quantity on the pallet, m ²	Quantity in truck, length 13,6 m*, m ²	Weight of a pallet, kg	Product codes						
					SONATA SAMBA	SONATA QUADRILLE	ACCORD PRAGA	TRIO SUPER	TANGO SUPER	YOGA HEXAGONAL	YOGA TRIO
COLORS	22 / 3,0	108	2 376	1 047,00	6S4E21-0860	6S4E21-0875	6S4E21-0866	6S4E21-0625	6S4E21-0810		
PREMIUM collection EN 544	22 / 3,0	108	2 592	982,20	6S4E21-0822	6S4E21-0821	6S4E21-0813	6S4E21-0815	6S4E21-0826		
RESIDENTIAL collection ETA 12/0234	22 / 3,0	108	2 484	1 036,20	4A4E21-1429	4A4E21-1408	4A4E21-1421	4A4E21-1407	4A4E21-1402		
STANDARD collection ETA 12/0234	21 / 3,0	108	2 052	1 209,00	3T4E21-1029	3T4E21-1014	3T4E21-1011	3T4E21-1025	3T4E21-1060		
ACCESSORIES	20 / 5,0	200	4 600	1 021,00	4K4E21-0025	4K4E21-0027	4K4E21-0126	4K4E21-0007	4K4E21-0022		
VALLEY MEMBRANE	1 / 10,0	230	5 060	1 079,00	1E6E21-0061	1E6E21-0075	1E6E21-0086	1E6E21-0077	1E6E21-0026		
MIDA SELF KSK	1 / 2,5	175	13 440	686,00	484571	484572	484573	484574	653339		
UNDERLAYMENT	1 / 15,0	345	12 800	652,50						Antracit	
	1 / 25,0	575	14 950	886,00						Sand	
	1 / 10,0	400	13 200	693,00						Sand	
	1 / 10,0	400	10 400	901,00						Antracit	

* the load in a truck cannot exceed a total weight of 24,000 kg.

PACKING LIST UNDERLAY

Code	Product name	Weight, kg/sq.m	Thickness, mm	Covered: top side / bottom side	Roll m /rol per pallet	Benefits
TN772881	MIDA SELF PRO	1,80	1,50	anthracite / self-adhesive	15 / 27	Temporary roof covering for 6 months
TN754987	MIDA ROOF FIX EMM SBS	1,50	1,50	sand / sand	25 / 23	—
TN750459	MIDA LIGHT S Euro	1,60	1,20	sand / sand	10 / 40	—
TN750460	MIDA LIGHT G Euro	2,20	1,20	sand / anthracite	10 / 40	Temporary roof covering for 6 months

